





 Type of material: epoxy painted steel casing

Standard colour: RAL 7035

Protection degree: IP20, according to EN 60529 standard

Fixing system: by no 4 M6 screws

Electrical connection: by cable FROR 3G1.0 (blue, brown and y/g)

Earth connection: by yellow/green conductor **Cable length:** 2,600mm (standard)


Appliance class: class I

Vertical dimensions: 45mm + (1.5mm + 3.5mm)Storage temperature: from -45°C to +75°C Rated temp. range: from -40°C to +70°C

Lifetime L10 at 40°C: 40,000 h

Motor protection: 40,000 h

Bearing: ball Approvals: CE

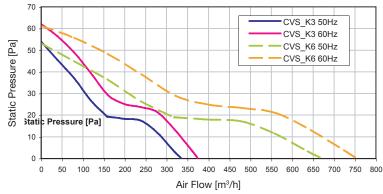

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow (*)	Static Pressure	Weight	Noise
	(V)	(Hz)	(mA)	(W)	(m³/h)	(Pa)	(Kg)	[dB(A)]
CSV230K3-00	230 a.c.	50/60	290/266	53/50	335/375	54/62	5.73	45.3/49.3
CSV230K6-00	230 a.c.	50/60	580/532	106/100	664/754	53/61	7.25	48.3/52.3

(*) data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.