

Technical Data

Construction



Socket materialPA black
Button material PA red
Protection interior IP6K9K IEC 60529
connector..... IP00 IEC 60529
Max. torquemax. 6 Nm
Weightapprox. 32g

Mechanical Data


Contact travel..... 40 ±3°
Operating force max. 40N
Current carrying partsCu-alloy
Contact material Ag-alloy
Mechanical life100 000 cycles
Temperature Range -40°C to +90°C

Electrical Data


Voltage Range9VDC to 32VDC
Electrical load 10mA to 5A

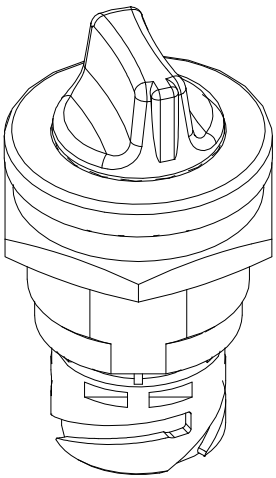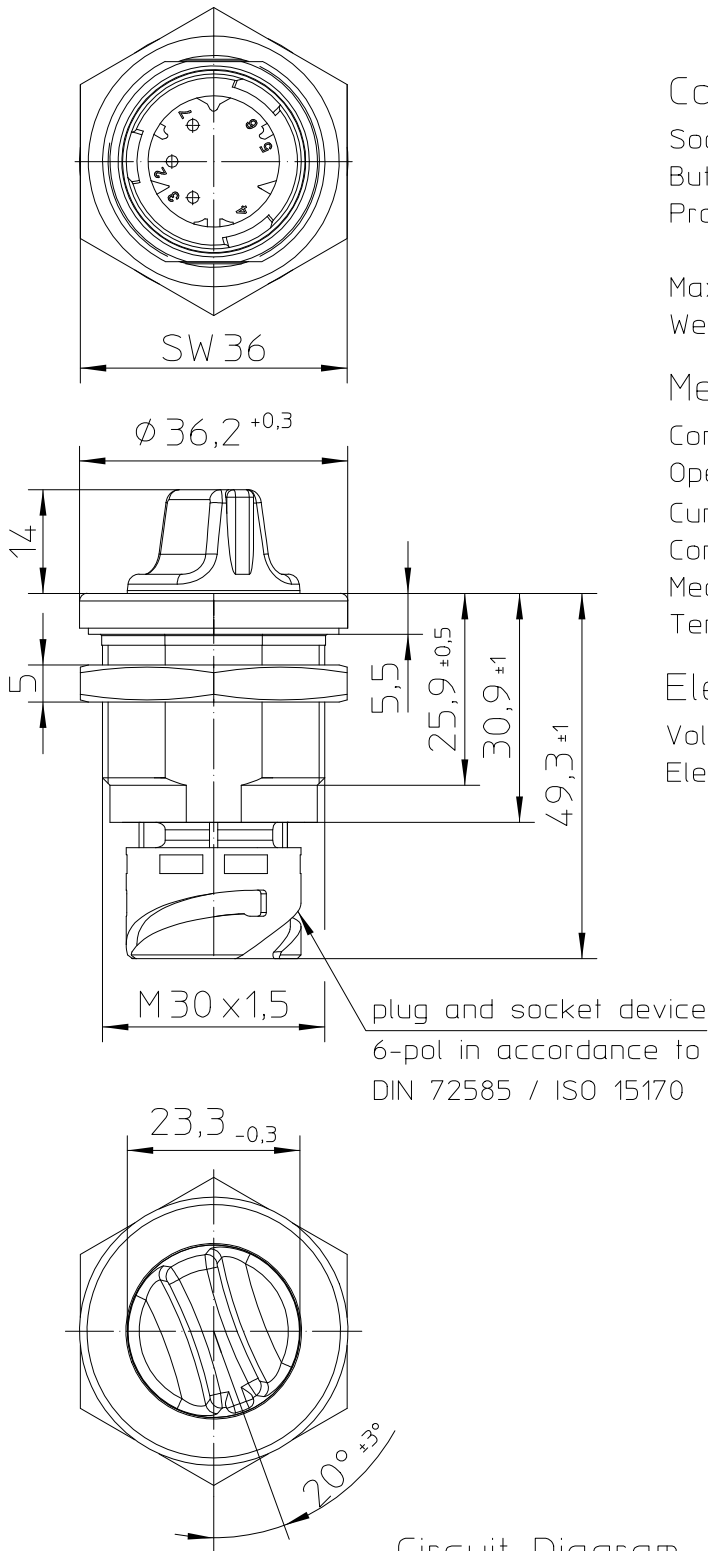

Mounting Dimensions



Circuit Diagram

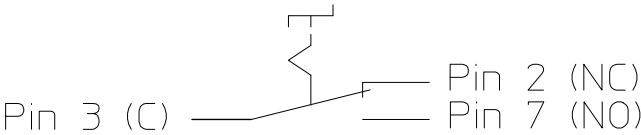

	Date	Name	mm	Scale		Drawing No:
Drawn	01.06.2017	Baumg		1:1		DS-211-RT1
Check	05.07.2018	Baumg		General Tolerances DIN ISO 2768 cL		NSN: